



Normally Open

SPECIFICATION

Specifications

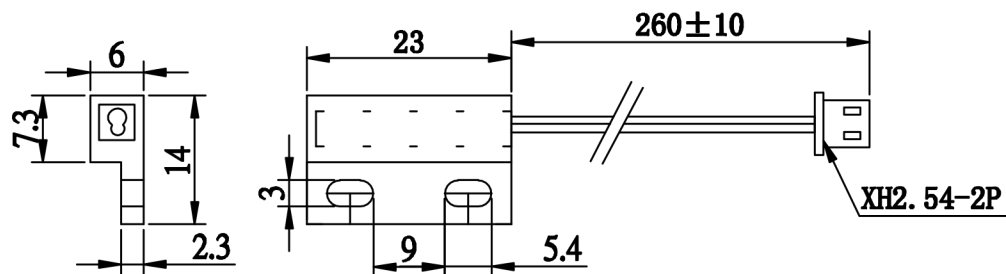

Action test

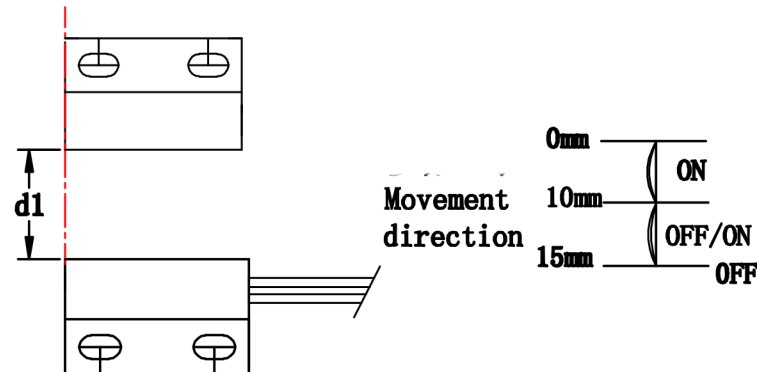

Movement
direction

0mm
10mm
15mm
ON
OFF/ON
OFF

Unit:mm

x ±0.5
x. x±0.3
x. xx±0.2

Material Specification	Switch Characteristic	Operating Characteristic
1.Float body : ABS	1.Contact from : A	1.Max Shock : 150g(1ms)
2.Write: UL1007 24	2.Max Contact Rating : 10 W	2.Max Vibration : 20g(1-2000HZ)
	3.Max Switching Voltage : 100 Vdc	3.Tempe operating : -10~+85° C
	4.Min Breakdown Voltage : 200 Vdc	
	5.Max Switching Current : 0.5A	
	6.Max Contact Resistance : 100mΩ	
	7.Min Insulation Resistance: 10 ¹⁰ Ω	

G-Tel Enterprise